



Ear protection





**ART.BA.3301105  
SINGLEUSE EARPLUG  
"LASER LITE®"  
PACKING 200 PAIRS**

Made of super-soft self-regulating polyurethane foam with a "T" shape for easier insertion. High noise attenuation. Packed in a single envelope. SNR 35 DB.

(Cord version Art. BA.3301106)

EN-24869-1:1993 / EN 352-2:1993

Packing: 1/10.

**Honeywell**



**ART.BA.1034522 EARPLUGS INSERT  
"TRUSTFIT" SNR 36dB BOX 100 PAIRS**

The TrustFit earplugs feature an ergonomic design and shaped foam pads, so that they can be inserted and removed without manipulating them between the fingers, thus making them a particularly hygienic solution for those who need to place and remove the inserts several times during the day. Made of thermoplastic elastometer material.


Box 100 pairs (single envelopes).

EN-352-2

Packing: 1/10.

**Honeywell**

**ART. BA.1005952  
BANDED EARPLUGS BILSOM PERCAP®  
PACK. 10 PIECES**

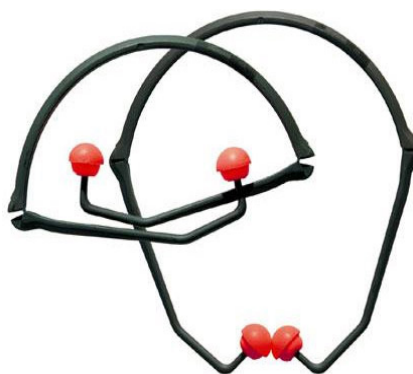

Earplug protection, soft foam fitting (interchangeable), stand outside of the auditive channel. The earplug can wear above the head, under the chin and behind the neck. Lightweight and foldable is the perfect solution for those who occasionally need hearing protection SNR 24 DB.

EN 352-2:2002.

Packing: 1/10.

**Honeywell**



**ART.BA.1029810  
"NEUTRON"  
SNR 20 WITH  
CORDED  
50 PAIR BOX  
REUSABLE**

Soft elastomer (TPE) and folded flanges for greater comfort and ease of insertion into the ear canal. Anatomically shaped earphones and translucent light blue color. Detachable cord, in yellow color to guarantee greater visibility. Reusable earplugs can last 2-4 weeks.

EN-352-2:2002

Packing: 1/10.

**Honeywell**



**Honeywell**



**ART. BA.1013040.2  
SPECIAL OFFER  
DISPENSER COMPLETE  
OF 200 PAIRS "BILSON 303L"**

Earplug dispenser included of 200 pairs earplugs SNR 33 DB. Can be hanging to the wall or leaning against the desk. The system delivers the earplugs by rotating the knob. (Spares art. BA.1006186).

EN 352-2:2002, EN 13819.

Packing: 1/10.

## Ear protection

**ART. BA.1011234  
FUSION DETECTABLE CORDED REUSABLE  
PACK 50 PAIRS - CASE FOR FOOD INDUSTRY**



**Honeywell**

Reusable insert detectable from metal detector. The soft dual material gives perfect comfort. Quadruple soft flange for better conformation of auditive channel. Rigid rod for an easy fitting. Detachable cord, for safety matter (catch). Practical case. Washable and reusable for 2-4 weeks. dedicated to food industry SNR 28 DB.

(available version not detectable ART.BA.1011282).  
NORM : EN 352-2:1993.

Packing: 1/10.

**ART. BA.3301167  
DETECTABLE EARPLUG CORDED  
LASER TRACK FOR FOOD INDUSTRY**



Food insert easily detectable with metal detector **SNR 35 DB**. Manufacture adjustable foam to fit perfectly to auditive channel. Not ferrous metal with bright colours.

NORM : EN-24869-1:1993 / EN 352-2:1993.

**PACK: 100 pairs.**

Packing: 1/5.

**ART. SB.419A  
FOLDING SAFETY EARMUFF SNR 30 DB**



Folding safety earmuff comfortable.

**SNR 30 DB.**

(Excellent value quality/prices).

**EN 352/1**

Packing: 1/10.

**Honeywell**

**metal  
FREE**



**ART.BA.1011994  
SAFETY EARMUFF  
LEIGHTNING L1NS  
NECKBAND  
SNR 29 DB**

The Air Flow Control™ technology delivers good tone down at all frequencies without increasing the weight or size of the cups. The insighfull sound into the cups, and thanks to a special plate joined to a layer of non-woven fabric, its filtered in correct way.The result is a better tone down across the spectrum of frequencies, suitable for any kind of noise.

**EN-352-1:2002**

Packing: 1/20.

**ART. BA.1013461  
SAFETY EARMUFF  
LEIGHTNING LON LOF - SNR 25 DB**



**Honeywell**

The Air Flow Control™ technology allows optimal attenuation on all frequencies, without increasing the weight or the size of the cups. The sound penetrates into the cups, and thanks to a special plate joined to a layer of non-woven fabric, it is filtered in a controlled way. The result is a better attenuation over the whole frequency spectrum, suitable for any type of noise.

**EN-352-1:2002**

Packing: 1/20.

**ART. BA.1011997  
SAFETY EARMUFF  
LEIGHTNING L2F - SNR 32 DB.**



**Honeywell**

The Air Flow Control™ technology allows optimal attenuation on all frequencies, without increasing the weight or the size of the cups. The sound penetrates into the cups, and thanks to a special plate joined to a layer of non-woven fabric, it is filtered in a controlled way. The result is a better attenuation over the whole frequency spectrum, suitable for any type of noise.

**EN-352-1:2002**

Packing: 1/20.



ART.BA.1011143

## CLARITY FOLDING EARMUFF CF1 DIELECTRIC FILTER OUT HARMFUL NOISE LET PASS THE VOICE



**Honeywell**

Improves communication, blocks noise. It allows you to hear voices, signals, alarms and other sounds with higher frequencies in a clearer and more natural way. It does not isolate the worker from the surrounding environment. Resistant to prolonged use and protect your workers in electrical environments. Folding bow quick height adjusting, snap-on bearings. Ideal in electrical environments and workshops.

**SNR 26 dB.**

**NORM: EN-352-1:2002  
EN13819.1.2**

**Packing: 1/10.**

ART. BA.1011145

## CLARITY® C2 MULTI-POSITION EARMUFF SNR 30dB- FILTER HARMFUL NOISE LEAVE THE VOICE



**Honeywell**

Thanks to the patented Sound Management sound filtration technology. They allow the user to hear the voices of other workers, alarm signals in a more natural way, blocking at the same time the harmful noise. Dielectric version. Snap-on bearings. The multi-position headband allows the user to select the position above or behind the head or under the chin.

**NORM: EN-352-1:2002**

**PACKING: 1/10.**

ART. BA.1010929

## THUNDER® T2s HEADBAND EARMUFF SNR = 33dB



**Honeywell**

AIR FLOW CONTROL™ technology. The sound penetrates into the cups, and thanks to a special plate joined to a layer of non-woven fabric, it is filtered in a controlled way. The result is better attenuation. Dielectric suitable for work in the presence of electricity risk. Quick adjustment, snap-on bearings. Extremely light, telescopic adjustment.

**PPE 2 Category  
NORM: EN-352-1.  
European  
Directive:89/686EEC**

**Packing: 1/10.**

ART. BA.1012533

## THUNDER® T1Hs HELMET EARMUFF SNR = 29



**Honeywell**

Earmuff with Universal Adapter (for almost all models on the market). AIR FLOW CONTROL™ technology delivers good tone down at all frequencies without increasing the weight. Fully without metal parts, and therefore suitable for work in the presence of electricity risk.

**PPE 2 Category  
NORM: EN-352-3:2002.**

**European  
Directive:89/686EEC**

**Packing: 1/10.**

ART. BA.1011264

## CLARITY™ CF1 - HELMET EARMUFF SNR 30 DB



**Honeywell**

Headphones for helmets SOUND FILTRATION TECHNOLOGY. Improves communication thanks to uniform attenuation across the entire frequency spectrum. Clarity blocks noise but at the same time allows you to hear voices, signals, alarms and other sounds with higher frequencies in a clearer and more natural way without isolating the worker from the surrounding environment. DIELECTRIC HEADPHONES The Clarity headphones are free of metal parts, and therefore dielectric QUICK ADJUSTMENT IN HEIGHT. ADAPTERS FOR VARIOUS HELMETS SUPPLIED.

**Norm: EN-352-3:2002  
Packing: 1/10.**

ART.BA.1030821 - QUIETPRO QP100Ex Intelligent

## Hearing protection and communication in high noises areas. CERTIFICATE ATEX (suitable for Oil & Gas)



**Honeywell**

Catch the voices through the internal microphone through the conduction of the air. This eliminates the noise of the surrounding environment that is caught with external microphones, allowing workers to communicate clearly. Earmuffs are ideal for whom works in confined spaces. **Allows workers to maintain awareness of the surrounding environment**, potential threat, and reduce further exposure to hazardous noises. The control unit is equipped of control buttons that allow the user to reduce or increase the level of surrounding sounds. Another button allows the user to control the transmission function of the connected radio. **Certification ATEX Ex ia IIB T4 . Ga (category 1 approved for zone 0, group of device 2, gas group IIB, temperature class T4).**

**NEW**



**Detectable version also for food companies**

## **ART. CUSTOMIZED EARPLUGS SNR 22/23/28/29 dB.**

Made-to-measure silicone caps, eliminates pressure in the ear. Built to measure for the user's ear canal and allow verbal communication reducing the feeling of isolation. The adjustable valve integrated with 4 attenuations, offers the possibility to let the voice pass and filter passive noise. Complete with cleaning cloth. They are hypoallergenic and breathable. Maintenance: wash with soap and water, dry, store in the box provided. **The mold must be made by a qualified audiologist agreement.**

Useful life from 3 to 5 years.

Warranty 2 years.

Norm: 352/2

Packing: 1/1.

**NEW**



**Honeywell**

## **ART.BA.1034510 SYNC™ WIRELESS EARMUFF Connect wirelessly, answer calls & stream information from your mobil phone SNR 32 dB**

Connectivity with mobile device via Bluetooth® at the touch of a button, allows connection to any device with Bluetooth functionality (mainly tested with telephones). Equipped with a microphone with wind protection, it allows the clarity of communication in high-noise environments. USB port for charging / lithium ion battery. No battery replacement required - 16 hours battery life (communication) - Charge in 4 hours (via wall charger) - USB cable and wall charger included. Indicator with flashing colored LEDs to visually indicate different settings. Easy to use, push-button panel

Power on - Bluetooth connection, activation, next, precedent.

Norm: EN 352-1 - EN 352-8 - EN 352-6.

European Directive: PPE 89/686/EEC - (Articolo 10)

Packing: 1/5.



**Honeywell**

## **ART.BA.1030111 EARMUFF SYNC™ STEREO SNR 31dB TO TUNE WITH MOBILE PHONE**


Sync models have no controls for volume adjustment, switches to be operated or batteries to be replaced. The ease of use of the Sync Stereo models is guaranteed by a volume adjustment and an on / off switch made directly via MP3 player, Blackberry or similar. In addition, the technologically advanced acoustic chamber of the Sync Stereo headphones improves the serious tones, which are usually sacrificed in the classic stereo noise protection headphones. The Sync™ Stereo VMT™ technology (Volume Management Technology) manages the volume of the portable audio devices by limiting it to a safe level.

NORM: EN 352-1 - EN 352-4 - EN 352-6.

European Directive: 89/686/EEC

Packing: 1/2.

**ART. SOUNDEAR®3**  
**MEASURE, MONITOR AND MANAGE NOISE IN MORE POSITIONS**  
**RECEIVE A VISUAL WARNING WHEN YOU PROTECT YOUR HEARING, PROGRAMMABLE ON NEEDED BASIS**

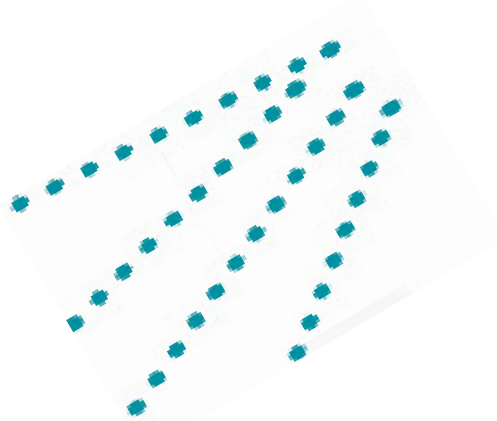

With the wireless noise measurement system, you can: measure and monitor noise in multiple positions, monitor noise levels through the included software. Receive alert notifications via e-mail when noise levels are too high, receive automatic noise reports in an e-mail. You can monitor noise levels for all devices at the same time, with the included SoundEar Software. Each device transmits noise measurements to your computer directly or via a cloud service. You can choose between 3 types of automatic data transport: wireless communication, Wi-Fi or LAN, up to 235 different positions, data transport via wireless. USB dongle. Continuous surveillance up to 6 weeks. All data is automatically organized in a simple calendar system. Parameters: measures 3 measurements simultaneously LAF; S; LCPeak; Laeq, 1s, Laeq ¼ h, Laeq 1 / 2h, Laeq 1 h. Resolution: 0.1 dB for all parameters. Measurement ranges: RMS: total 30 - 120 dB. Deviation: +/- 0.5 dB. Frequency range: 20 Hz - 20 kHz. Frequency weights: weighting A (RMS), weighting C (Peak). Time weighting: slow (1S) and fast (125 ms), dynamic range: 90 dB and peak detection. Light setting: full configurability through Soundear software including nightsetting. 2 outputs: 0-10 V or 4-20 mA, 2 xUSB outputs: Micro USB (power supply and PC), USB OTG (register, configuration) Display setting: LAeq 1 s., Alarm level and Clock. Power supply: 5VDC (Micro USB) / 24VDC. (Screw terminal) Current consumption: max 2.5 W. Internal memory: 16 MB (128 Mbit) (about 650 days log time). Real Time Clock: Hi-precision type with backup battery (CR2032). Microphone: 20 Hz - 20 kHz.

Misures 300/310: Length 256 mm, Width: 205 mm, Height: 45 mm, Weight: 1,5 kg

Misures 320: Length: 150 mm, Width: 120 mm, Height: 45 mm, weight: 0,45 kg.

Misures 3XL: Length: 595mm, Width: 412mm, Height: 59mm

Norms: IEC61672-2-2002, type 2, ANSI 51,4

Type 260601-1: Electromedical equipments

Part 1: general requirements for basic safety and essential services. 60601-1-2: Electromedical equipments

Part 1.2: General requirements for basic safety and essential services.

Performance. Connectivity accessories module GSM, 4 G module for the cloud solutions

Packing 1/1.



GAMMA SAFETY  
[www.gammasafety.it](http://www.gammasafety.it)

Authorized distributor Romania

RIG ENERGY CONSULTANTS SRL  
14 Gheorghe Grigore Cantacuzino  
100010 Ploiesti, Romania  
Email: [info@rigenergy.ro](mailto:info@rigenergy.ro)  
Mobile: +40 739 855 200  
[www.rigenergy.ro](http://www.rigenergy.ro)