



Fall protection





**ART.BA.1011896
FALL PROTECTION KIT
"TITAN"
3 category PPE death risk**

One-point harness with dorsal attachment, complete with energy absorber cord from mt. 2, with two carabiners. excellent for maintenance on cariponti etc ...

Packing: 1/10

CE EN355
EN361



**ART.BA.1011895
ROOFERS KIT MT. 10
"TITAN"
3 category PPE death risk**

Titan Roofer kit composed of : 2-point harness with rear and front anchorage (front webbing loops). Automatic rope grab with 10m anchorage line and 30 cm attachment lanyard. Complete of carrybag. Suitable for maintenance service when its needed to move.

Packing: 1/10

CE EN353.2
EN361



**ART.BA.1011890
1-POINT HARNESS
"TITAN"**

Harness with 1 attachment point (dorsal D-ring) with fast opening buckles and adjustable leg loops.

(Available also in 2-points version: BA.1011891).

Packing: 1/1.

NEW
CE
EN361



**ART.K.0020101AF
1-POINT HARNESS**

Harness with 1 dorsal D-ring for fall arrest system. Adaptable. Adjustable thighs. Highlights: shoulders and thighs distinguishable thanks to the use of 2 different colors. Ergonomics: ideally positioned under-glute strap to guarantee better comfort to the user.

Packing: 1/1.

CE
EN361

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



**ART.BA.1032876
"H - DESIGN"
TWO POINTS HARNESS
WITH ELASTIC TAPE
WITH AUTOMATIC
BUCKLES,
ANTI SWEAT**

Shoulder straps: elastic textile tape, with water-repellent / stain-proof treatment. Resistance to breaking: > 2200/2700 daN. D-ring for dorsal and sternal anchorage. Automatic buckles for greater practicality. Size: 2.

(Available also in belt version BodyFit Art. BA.1033541 - CE EN361 - EN358).

Packing: 1/1.

NEW
CE
EN361



**ART.BA.1032852
"H - DESIGN"
TWO POINTS HARNESS
WITH AUTOMATIC
BUCKLES,
STANDARD TAPE,
PROTECTED LABELS**

The two-point harness with automatic buckles, sternal attachment with metal ring, drop indicator, protected labels for easier traceability, water repellent tape, adjustable chest strap.

Size: 2.

(Available also in the bigger size version Art. BA.1032853 for weight from 120/140 kg).

Packing: 1/1.

CE
EN361

Fall protection



CE
EN361
EN1497

ART.EP.05017 HARNESS FOR CONFINED SPACES EN1497

2-point harness complete with extension belt for rescue complete with ring. 1 sternal and dorsal D-ring attachment. 5 adjustment buckles. Adjustable shoulder strap and thigh-straps. Designed to facilitate the intervention of rescue services in confined spaces.

Maximum user weight: 140 Kg

Size: universal

Packing: 1/1.



CE
EN361
EN1497

ART.K.0060101AF HARNESS FOR CONFINED SPACES EN1497

Harness 2 attachment points. Complete with extended belt with ring for rescue. 1 sternal and dorsal d-ring attachment. 5 adjustment buckles.

Adjustable shoulder strap and leg straps with straps.

Designed to facilitate the intervention of rescue services in confined spaces.

Maximum user weight: 140 Kg.

Size: universal

Packing: 1/1.



CE
EN361
EN20471/2

ART.BA.1032921 2-POINTS HARNESS "H-DESIGN" WITH ELASTIC RIBBON COMPLETE OF HIGH VISIBILITY VEST

Miller H-Design ® 2-point harness with elastic straps, front and rear attachment point and quick buckles. Vest with repellent fabric H.V. yellow with reflective tapes certified to EN ISO 20471/2. Side sliders with double slider. Internal hinges for easy access to the harness for adjustments. Removable vest, easy to attach to the harness thanks to its quick-coupling system (buttons). Vest suitable for any Miller H-Design harness: complete with various pockets. 1 slit on the back with Velcro to support the rear D-ring.

Size: 2.

(Available also in orange color)

Packing: 1/1.



CE
EN361
EN20471/2

ART.K.0020301AF 2-POINT HARNESS COMPLETE OF HIGH VISIBILITY VEST

Harness with 2 attachment points with high visibility yellow work vest, incorporated in the high visibility vest in an indissociable way. Polycotton jacket (240g / m2). Attachment points - 1 dorsal D-ring, 1 sternal attachment consisting of 2 textile buckles for fall arrest system. Thigh straps are equipped with self-locking buckles. Belt under glute ideally positioned to provide the user with better comfort. Breathing material, reflective tapes and adjustable zip system.

Conform to Norms EN 361 EN 20471/2.

Packing: 1/1

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



CE
EN361
EN358
EN813
EN12277

ART.K.Y554PNEW HARNESS WITH BELT AND PADDED COSCIALS, AUTOMATIC BUCKLES

Ideal harness for fall arrest, positioning, climbing, descent and rescue. Back and chest with D-ring. 2 rings at the waist, 1 in the abdominal area to work in suspension, elastic straps anti-trauma. Automatic buckles in stainless steel. Resistant to UV rays. Quick stitching for eyepiece control. Prepared for release in the upper part for climbing.

Packing: 1/10



CE
EN361
EN358
EN813

ART.K.1020201AF HARNESS WITH BELT AND PADDED COSCIALS, AUTOMATIC BUCKLES

Ideal harness for fall arrest, positioning, climbing, descent and rescue. Back and chest with D-ring ring. 2 rings at the waist, 1 in the abdominal area to work in suspension, elastic straps anti trauma. Automatic buckles in stainless steel. Resistant to UV rays.

Maximum user weight: 140 Kg.

Packing: 1/1.



ART.BA.1003017.R HARNESS MILLER R 'TST WITH INCORPORATE SEAT

The Miller R'TST 2-point harness is specifically designed for operators in the high voltage electrical sector, as it provides maximum comfort and flexibility during maintenance work on overhead power lines. 180° rotation. Supplied with a screw-in carabiner and seat for built-in suspension.

Size: 2.

Packing: 1/1.



ART.BA.1014433 HARNESS MILLER 'ROPAX'

3-point harness (dorsal, sternal and ventral) with belt. Suitable for rope and suspension work. Padded thighs, automatic buckles. Textile ribbon in black polyester. Ergonomic design and new triangular suspension position. This distributes the forces between the leg loops and the waist belt on 4 pressure points rather than concentrating on the legs, thus reducing the risk of suspension trauma. The V-shape of the shoulder straps allow you to place them at a distance from the neck. Easy to use and wear: the leg loops and anchorage points are clearly identified. Excellent chemical and abrasion resistance: the black polyester tape and the stainless steel components offer optimal durability. Adaptability: climbing seat.

Packing: 1/1.



ART.K.0021201AF DIELECTRIC 3-POINTS HARNESS WITH BELT

Dielectric harness, designed for those operating in conditions that foresee possible electrical risks. The straps of the shoulders, thighs, the belt and the chest are all adjustable self-locking. "D" connection ring and metal adjustment buckles coated with special insulating polymers to guarantee complete electrical protection. Elastic material for greater comfort. Three attachment points, dorsal, sternal, lateral. Complete with belt.

Size: universal.

Norm: EN358 / 361.

Packing: 1/1.



ART.BA.1006076 HARNESS MILLER ELASTOLIGHT

Harness, elasticated shoulder strap, front attachments, D-shaped back ring, comfortable positioning belt. Designed for "electric" companies, this harness is the perfect solution for positioning and ascent, thanks to the dorsal, sternal and lateral attachments. Greater freedom of movement thanks to the extensible straps that also increase productivity. Convenient: dorsal padding and straps that are easy to adjust. Adaptable. This harness has been specifically designed for work on electricity poles.

Size: 2.

Packing: 1/1.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



ART.K.1001201AF DIELECTRIC HARNESS WITH BELT AND PADDED COSCIALS, AUTOMATIC BUCKLES

Harness **ideal for fall arrest in the wind energy sector environments, coated for electrical protection.** Dorsal and sternal attachment, complete with 5 D-ring. Full protection on the back. Automatic buckles. 3 large tool carrier rings. Ergonomics: elastic straps for prolonged comfort. Specially cushioned for better shock absorption.

Packing: 1/1.



ART.K.0011201AF FIRE-RESISTANT HARNESS FOR WELDING IN HEIGHT

Fireproofing harness. Designed to offer a perfect solution in height welding jobs. Adjustable shoulders, thighs and belt. The belts of the thighs and the belt are equipped with self-locking buckles. 1 ring and 4 buckles. Equipped with tool belt. Reinforcement at the level of life for better user support. Ideally positioned subglutea belt.

Complies with ISO 9150: 1988 and ISO 15025: 2002.

Sizes: universal.

Packing: 1/10



EN361

ATEX 94/9/CE
EN 13463-1 (2001)
EN 13463-5 (2005)

ART.K.0090101AF ATEX HARNES 1-POINT DORSAL ATTACHMENT WITH EXTENSION BELT

This harness is designed to provide a perfect solution for working at height in explosive atmospheres. It is particularly suitable for industrial environments such as petrochemical, mining, etc. Attachment points: 1 dorsal D-ring in forged aluminum with extension straps, 1 sternal attachment composed of 2 textile buckles for fall arrest system. Adaptability: adjustable shoulders and thighs and chest strap.

Max user weight: 140 Kg.

Packing: 1/1.



EN361

ATEX 94/9/CE
EN 13463-1 (2001)
EN 13463-5 (2005)

AUTHORIZED
DISTRIBUTOR

Honeywell
Miller



ART.BA.1015075 TWO POINT HARNES WITH AUTOMATIC BUCKLES CERTIFICATE ATEX ANTISTATIC

Ideal solution for work in environments at risk of explosion. Two-point anchorage (integrated extension) and sternal (holes). Eliminates any spark risk. Automatic buckles.

Size: L/XL.

(Available also size XXL:
Art. BA.1030510).

Packing: 1/1.



EN354



AUTHORIZED
DISTRIBUTOR

Honeywell
Miller

ART.BA.1030951 EXTENSION FOR HARNES 'MD06'

Harness extension full back attachment with two connectors.

EN 354.

Packing: 1/10



EN360
EN13463-1/5

ART.EP.2841 SELF RETRACTING LIFELINE MT.20

Automatic retractable with Ø 4.8 mm galvanized steel cable, technopolymer housing, max. length 20 mt. Complete with upper ring and carabiner with 17 mm opening. Swivel bottom hook with 21 mm opening. Complete with carrying handle.

Approved for horizontal use.

EN360 - EN 13463-1/5

Packing: 1/5.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



EN360

AUTHORIZED
DISTRIBUTOR

Honeywell
Miller

ART.BA.1012437 SELF RETRACTING LIFELINE 'MILLER' Falcon MT.20

Internal components in aluminum and anti-corrosion steel, high impact resistant nylon casing, ergonomic handle. CARTER GUARANTEED TO LIFE. Visible fall indicator, rapid activation braking, optimal for horizontal applications. Weight kg. 7.7. Complete with control card attached to the product for annual self-certification.

Available also in the version with automatic steel hook mounted on a rotating steel mechanism, and CS20 carabiner ART. BA. 1011750.

Packing: 1/10.



EN360
EN13463-1/5

ART.K.0300402AF SELF RETRACTING LIFELINE MT.30

Automatic retractable with Ø 4.8 mm galvanized steel cable, technopolymer housing, max. Length 30 m. Complete with upper ring and carabiner with 17 mm opening. Swivel bottom hook with 21 mm opening. Complete with carrying handle.

Approved for horizontal use.

EN360 - EN 13463-1/5

Packing: 1/5.

NEW

CE

EN360
EN13463-1/5

AUTHORIZED
DISTRIBUTOR
Honeywell
MILLER



ART.BA.1034139E SELF RETRACTING LIFELINE MT. 40

Self Retracting lifeline mt. 40, suitable for onshore and offshore sector oil and gas.

Completely sealed to protect the brake system, the feeding spring and the bearing.

30% more light from the other type. Work load limit: kgs.140.

Complete of Karabiner and turning ring.

(AVAILABLE ALSO IN THE VERSION MT. 15 ART. BA.1034130-E).

EN360 - EN 13463-1/5

Packing: 1/1.

NEW

CE

EN360
EN362

AUTHORIZED
DISTRIBUTOR
Honeywell
MILLER



ART.BA.1004575 GALVANIZED WIRE RESCUE BLOCK LIFELINE "MI58 - MightyLite" MT. 40

Retractable device in galvanized steel. Rugged and compact, easy to use, with metal case, stainless steel spring and fall indicator. The device is equipped with a double lever rotating hook.

Tensile strength > 12KN,

Weight (kg) 23.6 kg.

Norm: EN360/362.

(AVAILABLE IN THE VERSION MT. 30 ART. BA.1004574)

Packing: 1/1.

NEW

CE

EN360
EN13463-1/5

AUTHORIZED
DISTRIBUTOR
Honeywell
MILLER



ART.K.2000502AF DOUBLE SELF- RETRACTING LIFELINE MT. 2

Double aluminum casing with polyester lanyards. Maximum length : 2 m., belt width : 25 mm. weight : 2,80 kg.

Resistance : > 15 kN.

Connectors supplied : 2 carabiners

EN360.

Packing: 1/1.



AUTHORIZED
DISTRIBUTOR
Honeywell
MILLER

CE

EN353.2



ART.BA.1011191 TITAN™ AUTOMATIC ROPE GRAB MT. 20

The automatic rope grab and the anchor line protect the user from falls during the ascent or descent. Particularly useful on sloped roofs and, in general, in situations where retractable devices can not be used. The automatic guided type device is equipped with a quick activation locking system that limits the free fall in a few centimeters. The rope is 20 meters long.

Packing: 1/10.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS

CE

EN 358

NEW

ART. BA.1032125 MILLER HANDZUP® Work positioning lanyard 20 mt with SNAP HOOK

The new HandZup® is a unique and patented workplace positioning system (EN 358). Leave your hands free and allow the operator to work in complete safety. Its ergonomic design makes it easy to use. The replacement of the rope is immediate through the openable compartment, ensuring the quick adjustment. The supplied cable 20 mt is made of polyurethane material twice as resistant compared to those on the market. Without carabiners and without protective sheath.

EN 358.

Packing: 1/1.



AUTHORIZED
DISTRIBUTOR
Honeywell
MILLER

CE

EN 358



ART. BA.1032097 MILLER HANDZUP® Work positioning lanyard 2 mt with SNAP HOOK

The new HandZup® is a unique and patented workplace positioning system (EN 358). Leave your hands free and allow the operator to work in complete safety. Its ergonomic design makes it easy to use. The replacement of the rope is immediate through the openable compartment, ensuring the quick adjustment. The supplied cable 2 mt is made of polyurethane material twice as resistant compared to those on the market. End-coated with plastic sleeve, equipped with a hole with twist lock carabiner and carabiner to "D".

EN 358.

Packing: 1/1.

Honeywell
MILLER AUTHORIZED
DISTRIBUTOR

Fall protection



Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

ART.BA.1013431 TITAN™ FORKED LANYARD SHOCK - ABSORBING MT.2 IDEAL FOR SCAFFOLDINGS

Connectors: 2 scaffold hooks (65mm) and screwgate karabiner. Complete with energy absorber.

Packing: 1/1.

CE EN355



CE

EN355

EN362

2 mt. fork lanyard complete with energy absorber, 3 karabiners with screw closure opening 18 mm.

23 mm tape in sturdy polyester.

Operating temperature
From -30 ° C to + 50 ° C.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS

Honeywell
MILLER

AUTHORIZED
DISTRIBUTOR



ART.BA.1008278 SAFE B2 - ROPE FALL WITH GIRDER GRIP AND CONNECTOR

Lanyard with energy absorber mt. 2. Complete with one twist lock connector and girder grip diam. 75 mm.

Ideal for scaffolding

Packing: 1/1.

CE EN355

Honeywell
MILLER

AUTHORIZED
DISTRIBUTOR



ART.BA.1008275 TITAN™ B SHOCK ABSORBING LANYARDS

Lanyard with energy absorber. Made of polyamide diam. 12 mm. Length 1.8 meters Without carabiners and reinforced terminal slots.

Packing: 1/1.

CE EN355

NEW



ART.K.5120403AF FORKED SHOCK- ABSORBING WEBBING LANYARD 1,5m IDEAL FOR "WELDING"

Double lanyard with 1.5 m energy absorber. Equipped with 1 carabiner and two scaffolding hooks with 55 mm opening. Made of 371 ° temperature resistant material. Complies with ISO 9150/15025.

Packing: 1/1.



CE EN 355



ATEX 94/9/CE
EN 13463-1 (2001)
EN 13463-5 (2005)

CE

EN355



ART.K.5130403AF FORKED SHOCK- ABSORBING LANYARD "ATEX"

Forked energy absorbing webbing lanyard with 2 connectors (antistatic). 44 mm wide shock-absorber to have an impact less than 6 kN in case of a fall. Complete with 2 aluminium double-sided scaffold hooks with double action and automatic locking, 60 mm opening, 1 aluminium carabiner with 22 mm opening, with screw locking. Connectors and buckles: aluminium, length 1.5 m (connector included).

Packing: 1/10.




Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

ART.BA.1015859 DOUBLE LANYARDS WITH SHOCK-ABSORBER CERTIFIED "ATEX"

Atex double lanyard lenght 1.15 mt., Complete with 2 GO60 karabiners (60 mm opening, 23 kN resistance) with self-locking opening and rope retainer. No. 1 karabiner with 16 mm opening in all. nio (28 kN resistance), energy absorber. Made of antistatic 25 mm polyester tape. Operating temperature from -30 ° C to + 50 ° C.

Packing: 1/1.

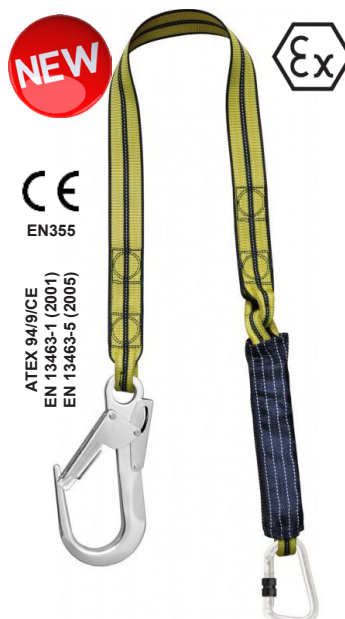

ART.K.0260303AF ENERGY ABSORBING WEBBING LANYARD ATEX

Lanyard with ATEX energy absorber. 44 mm wide energy absorber for an impact less than 6 kN in the event of a fall. Lanyard in polyester width 44 mm. Connectors: 1 aluminium carabiner for scaffolding with double action automatic closing and locking, 60 mm opening, 1 aluminium carabiner with screw locking, 22 mm opening. Length: 2 m Connectors included

Packing: 1/10.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



CE
EN354
EN358
EN362

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

ART.BA.1032351 MILLER KERNMANTEL FORKED RESTRAINT LANYARD 1 MT. WITH 1 TWIST LOCK KARABINER AND 2 GO55 (MM55) SCAFF. HOOKS.

Made with a light green rope with black streaks, which are visible from a distance to increase safety in the workplace, the points are clearly visible which facilitate safety checks before use. Length mt. 1 equipped with a steel screw carabiner and nr. 2 scaffold hooks 55 mm steel opening.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

ART.BA.1008285 WORK POSITIONING ADJUSTABLE LANYARD

Work positioning Lanyard - 12mm Polyamid Rope 1.8mt adjustable. Breaking strength > 15 kN Lanyard without connector.

Packing: 1/1.



CE EN354



CE EN354

ART.BA.1008270 RESTRAINT LANYARD 1 MT.

Polyamide rope restraint lanyard width: 12mm, 1mt lenght and 2 loops. Its 2 reinforced connection points High breaking strength. Breaking strength > 22 kN. No connector.

Packing: 1/1.



CE EN362

ART.BA.1018960 KARABINER CS20

Karabiner, oval in galvanized steel. Opening 17 mm, length 104 mm., Width 58 mm.

(AVAILABLE CHEAPER MODEL:
TWIST LOOK ART.BA.1018963).

Packing: 1/1.

Fall protection



NEW


ART.K.0010901AF SUSPENSION TRAUMA RELIEF

Extremely effective, specially designed to help relieve the negative effects of suspension trauma. Compact and light-weight. Does not hamper the activity of worker while at work.

Allows the suspended worker to stand up in his harness to relieve pressure. Easy to attach to the harness with the help of the textile loop and velcro provided. Easy deployment ; operation is fool-proof. Material: Polyester. Buckle material : Steel

Size: Universal.

Packing: 1/100.



CE



NEW

ART.K.0010009AF EQUIPMENT ROPE MAX KG.7

It allows to prevent the possible fall of tools. Keeping them hooked to the user or to an anchor point. Increased safety for those working under the user. Elastic belt complete with aluminum "miniconnector" to be hooked to the belt or to the user's harness. Maximum weight: 7 kg.

Packing: 1/100.



CE

ART.K.0080006AF BEAM ANCHOR

NEW




CE EN795B

Mobile anchoring device for beam, materials: aluminum and brass. Designed to be installed on beams of width between 100 and 330 mm. Resistance to breaking: 23kN. Weight: 1.85kg

Packing: 1/1.

ART.BA.1007066 "BEAM ANCHOR"

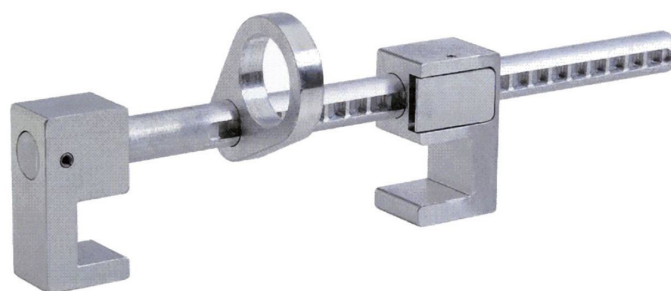

EN795B CE

Honeywell
MILLER

AUTHORIZED
DISTRIBUTOR

Anchoring device for fully adjustable beams. Suitable for beams of width between 75mm and 360mm ; built in aluminum. Resistance to breaking: 22kN. Weight: 1.4kg.

Packing: 1/1.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS

ART.K.0051006AF DOOR AND WINDOW ANCHOR



NEW

CE EN795B

Door and window anchoring device tested for use with two people. Conceived to be installed on frames from 60 to 125 cm. Anchoring provided with a special carrying bag. Resistance to breakage 13kN. Weight: 4.75 kg.

Packing: 1/1.

ART.BA.1007046 EVAC BODY SPLINT FOLDED FOR CONFINED SPACES

CE



NEW

Honeywell
MILLER

AUTHORIZED
DISTRIBUTOR

"EVAC" roll-up stretcher kit. Ideal for evacuation in confined spaces. Once closed around the injured, it acts as a rigid stretcher. It can be used both vertically and horizontally. Made of polypropylene. Equipped with foot supports. It can be stored in an easily transportable bag complete with shoulder straps for a support and protection for the injured person. Packing: 1/1.



FIXED SYSTEM FOR LOADING / UNLOADING MATERIALS BY LARGE MEANS OF TRANSPORT

It allows you to work safely, preventing the risks of falling. These simplified assembly and disassembly systems can be positioned near the load thresholds, ensuring operator safety. Each system can support only one operator: fixing the base to the ground is guaranteed by a ballast of three tons per system. Depending on the needs, it is possible to choose systems consisting of one or two support arms. System compliant with EN 795 cl. B.

The anchor point at 6 m height allows you to work up to 5 m above ground level; if the load system exceeds 6 meters in length, a double system must be used. Systems with double units must always be used together to operate simultaneously on two 12 m trailers.

They can be supplied with prefabricated ballast or adapted to formwork to be filled with gravel, concrete castings, etc.

Single load system equipment:

- Support frame, consisting of column base and horizontal arm
- Miller Falcon retractable fall arrestor 6.2 m
- Two-point Miller Duraflex harness, size M / L
- Miller harness extender 0,3 m
- Recovery rope

Equipment of the double loading system:

- Support frame, consisting of column base and horizontal arm (2)
- Miller Falcon retractable fall arrestor 6.2 m (2)
- Two-point Miller Duraflex harness, size M / L
- Miller harness extender 0,3 m
- Recovery rope. N.B. Single and double loading systems require 3 and 6 tons of ballast respectively.

HORIZONTAL FIXED LIFELINE CUSTOMIZED AND DESIGNED

Horizontal life line on rigid guide in compliance with the UNI EN 795 - class D standard, which protects those who work at height from the risk of falling. The tracks can be installed along the entire perimeter at risk of falling. They offer the advantage of greater fixing distances, as well as the possibility of having a higher number of simultaneous users.

Only a few components of the system are required. The carriages slide easily on the guide rails following the user.



ART.BA.1011160 TEMPORARY LIFE LINE TAPE LENGTH MT. 20

Guarantees a large work area. Can be used by 1 or 2 operators. Maximum working length: 20 meters. Fixing to permanent anchorage points or temporary anchoring tapes. Features: 35mm resistant polyester tape, supplied with length adjuster. Bag included. EN795B

Packing: 1/1.

EN795B



Honeywell
MILLER AUTHORIZED DISTRIBUTOR

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



NEW

CE
EN 341
EN1496

ART.BA.1028754 "SAFESCAPE" CONTROLLED EVACUATION DEVICE MT.20

Thanks to its high-quality anodized aluminum housing, this device maintains its optimal conditions of use, even in the most difficult situations. Descent of 8.000m per 100kg, maximum descent height of 500m, use in case of emergency for 2 operators with total weight up to about 250kg. Re-certification is only required after seven years, thanks to robust and durable components. Aluminum pulley, karabiners: 134x75mm Opening: 20mm. Descent speed: 1m / second.

Norm: EN 341- EN1496.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



CE
EN1496
EN795b

ART.BA.1002920 PORTABLE PIVOTING DAVIT COLUMN "POTEX" WITH RESCUE WINCH 30 MT.

Davit with integrated rescue winch 30m, adjustable feet to adapt to various situations. Revolving lifting system. Easy access in confined spaces.

Height: open: Maximum external height 2.25m. Folded: Minimum external height: 2.05m.

Length: extended: 1.3m, portrayed 1.3m.

Width: open: Maximum outside: 1.3m Distance between feet: 1.11m.

Maximum working load: 165 kg.

(THE DEVICE CAN BE RELEASED FROM THE BASE AND POSITIONED IN THE GRILLS).

Packing: 1/1.



NEW

ART.BA.1034543C DAVIT "DURAHOIST" WITH SWIVEL AND REVOLVING ARM MT.30

Davit with integrated 30m rescue winch, adjustable feet to adapt to various situations. Rotating and swiveling lifting system. Easy access in confined spaces. Height: open: Maximum external height 2,54m. Folded: External minimum height: 2.01m. Extended length: 0,65 m. Base: width reg. 1/1,70 mt. Maximum workload: 300 kg Maximum worker load: Kg. 136.

Conform to Machinery Directive

CE
EN795b
EN1496
EN360

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



ART.BA.1034537 FLOOR BASE "DURAHOIST"

Floor base for mounting on horizontal concrete or steel structures, including a PVC sheath. Galvanized steel version.

(AVAILABLE IN STAINLESS STEEL ART. BA.1034538).

Packing: 1/1.



NEW

CE
EN360
EN1496
EN795

ART.BA.1034911 TRIPOD MILLER COMPLETE FOR CONFINED SPACES "DURAHOIST 3POD"

New DURAHOIST 3POD tripod. Easy to carry with just one knob to secure all legs together. Adaptable from 1 to 2.50 mt. Tested for 2 people of 140 kg. each. Complete with structure, vericello, retractable device with recovery system. Points of attachment on the head 3 holes + an eyelet, adjustable legs. New stronger legs. Brackets for the connection of the quick and adjustable height. Maximum load 300 Kg The package includes: tripod, RESCUE/ RETRIEVAL / winch, and 2 hooking brackets.

EN795B
EN 1496
EN360

Packing: 1/1.

NEW

CE
EN795B



ART.BA.1034430 DURAHOIST 3POD TRIPOD IN ALUMINUM FOR CONFINED SPACES

Easy and safe installation in less than 2 minutes (all legs open simultaneously, 1 single knob fixed all legs together). **Tested for 2 people (up to 140 kg each).** Equipped with 4 anchor points located on its head, as well as 2 pulley fixed on the legs. It can be transported by one person. Brackets for easy and quick connection. Rescue device with recovery position to secure the entrance to the confined space (fall barrier). Saving a person Winch for lifting loads (Maximum load limit 300 kg). Weight kg. 16.5. extension from 1.40 to 2.90 h.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



EN360

EN1496

EN13157

ART.BA.1034612 WINCH MATERIAL HANDLING DURAHOIST 30 MT (COMPLIES WITH THE MACHINERY DIRECTIVE)

DuraHoist winch can be used to make go down and lift equipment, tools and other types of materials. The maximum weight load limit for material handling is 300 kg. To be used with tripod art.BA.1034430. Length mt. 30 (available also from 15 mt ART. BA.1034611).

SUPPORT BY PART: ART. BA.1034613.

Complies with directive machine 2006/42/CE.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



EN360
EN 1496

ART. BA.1005149A MIGHTEVAC® RESCUE/RETRIEVAL HOIST MT.15 PPE cat. 3 Death risk

Fall arrest device with recovery function, equipped with 4.8mm galvanized steel cable, length 15 mt .. Maximum load: 136 kg. Easy installation fixing of the support positioned outside the leg of the tripod (easy to use for left and right handed). To be used together with the DuraHoist 3Pod tripod. (excluding support articles BA 1034431 - EN795).

EN 1496 - EN 360.

Packing: 1/1.



EN360
EN 1496

ART. BA.1005160A MIGHTEVAC® RESCUE/RETRIEVAL HOIST MT.30 PPE cat. 3 Death risk

Combines the superior performance and reliability for emergency evacuation 30m - Cable self-retracting lifeline with emergency retrieval winch.

Easy-to-use. Used in conjunction with the Miller Tripod DuraHoist 3Pod and dedicated brackets to form the core of a stable and secure confined entry/rescue system. Features: 4.8mm galvanized or stainless steel cable. Quick-activating retrieval winch mechanism. Pressed steel housing and compact design. Rescue winch (up/down), gear ratio 5:1. Corrosion-resistant stainless steel/ aluminum components.

(Excluding support art.BA.1034750 - EN 795)

EN 1496 - EN 360.

Packing: 1/1.

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR

NEW

EN795B



ART.K.0010006AF TRIPOD COMPLETE OF TRANSPORT BAG

Tripode for confined spaces. Equipped with two pulleys on the tripod head, two anchor rings, feet in all.nio equipped with steel soles with rubber pads to increase stability. Resistance of anchorage points> 10kN. Complete with fixing plate for winch art. K.0030006AF.

Dimension: diam. 150 cm.

Height: 115/215 cm.

Packing: 1/1.

REVISIONS AND REPAIR CENTER FOR FALL ARREST SYSTEMS



EN360
EN1496
EN13157

ART.K.0032006AF WINCH FOR TRIPOD (ART.K.0010006AF) MT.20 FOR RISE AND DESCENT OF THE WORKERS

Work Winch for rescue, used to rise and descent personnel and materials in confined spaces. Supplied with the fixing system suitable for the tripod plate. Nominal lift capacity Kg. 125, Length mt. 20, galvanized steel cable of 4.8 mm. To be used in combination with retracting.

Conforms to Machinery Directive 2006/ 42/CE EN 13157/2004

Available also version 20 mt. (ART. K.0030006AF)

Packing: 1/1.



EN360
EN1496

ART.K.0310402AF RETRACTABLE FALL ARRESTER WITH INTEGRATED RECOVERY SYSTEM FOR TRIPOD OR DAVIT MT.30

Polymer casing with galvanized steel cable and integrated system recovery. Rope diameter: 4.5 mm, length: 30 mtr .. Complete with: 1 stainless steel screw-hook carabiner and a steel hook-hook carabiner with fall indicator.

Approved for a user with a max. weight of 140 kg in vertical use.

Integrated recovery system, the device can be **adapted on our tripod, through the adaptation kit art. K.2010006AF.**

Packing: 1/1.



NEW

CE
EN360
EN1496

ART.K.0210402AF RETRACTABLE FALL ARRESTER WITH INTEGRATED RECOVERY SYSTEM FOR TRIPOD OR DAVIT

Polymer casing with galvanized steel cable and integrated system recovery. Rope diameter: 4.5 mm, length: 20 mtr... Complete with: 1 steel snap-hook carabiner and a steel hook-hook carabiner with fall indicator. Approved for a user with a max. weight of 140 kg in vertical use. Integrated recovery system, the device can be adapted on our tripod, through the adaptation kit art. K.4022006AF.

Packing: 1/1.



NEW

CE

EN360
EN795b
EN1496
EN13157

ART. K.0022006AF DAVIT ROTABLE 360° WITH 30 MT WINCH SUITABLE FOR UP AND DOWN PEOPLE AND MATERIAL

Provides a secure system for easy access to tight spaces. Complete with winch and recovery / retractable 30 meters. complete with support plate. The height of the arm allows the operator to adjust it in 3 defined points and in height up to 2.3 m, complete with floor bracket.

Conforms to Machinery Directive 2006/ 42/CE

Packing: 1/1



NEW

CE
EN353-1

ART.K.0008SK VERTICAL FALL ARREST SYSTEM

Fall arrest anchor for ladder made of stainless steel. Complete with sliding carabiner on guide for hooking to the harness. Modular modules of 3 mt.

Project on request.

Packing: 1/1.



NEW

CE
EN353-1

ART.K.0009SK VERTICAL FALL ARREST SYSTEM

Vertical fall arrest system composed of ladder rungs fixed on an aluminium rail, a vertical trolley, a top extension, a rail extremity, an intermediate rail, mounting bracket. Modular modules of 3 mt.

Project on request.

Packing: 1/1.



NEW

CE
EN131/7

ART.GA.AIR ULTRA LIGHT LADDER FOR HIGH ALTITUDE WORKS

Ladder folding aluminum with folding basket for working safely. Made of aluminum, thanks to the X-shaped legs for a better opening even at high altitudes. Front legs independently adjustable to handle uneven surfaces. Minimum floor height from 3.10 up to 7.70 mt., Minimum external height 3.10 up to 4.60 mt. (depending on the models).

Max load: 150kg.

Packing: 1/1.



CE
EN131/7

NEW

ART.GA.FLY ULTRA-LIGHT FOLDING LADDER

Ladder with height adjustable basket, foldable for transport. Built in aluminum. Height: from 1.60 to 3.20 meters on the floor. (depending on the models). Folded: Minimum external height: 1.94 to 2.42 meters. Pedestrian width 0.79 mt. to facilitate the passage.

Maximum working load: 150 kg.

Packing: 1/1.





GAMMA SAFETY
www.gammasafety.it

Authorized distributor Romania

RIG ENERGY CONSULTANTS SRL
14 Gheorghe Grigore Cantacuzino
100010 Ploiesti, Romania
Email: info@rigenergy.ro
Mobile: +40 739 855 200
www.rigenergy.ro